




# HIGH LINE

## Recessed Curtain Track

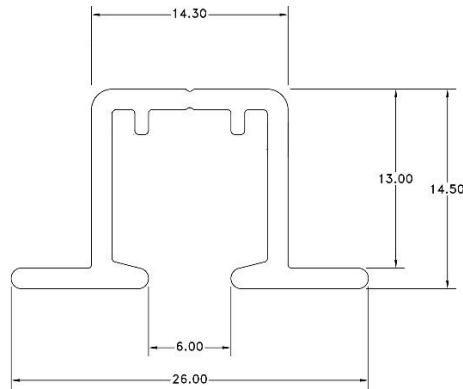

The Martec “High Line” (Recessed Track) is designed to fit into a cut-out in the ceiling GIB so that it sits flush with the ceiling.

The wide flanges on the bottom of the profile cover any unevenness in the cut recess.

High Line features a unique removable End Hook system, which allows for easy removal or addition of glides after the track has been installed, whilst at the same time being able to utilise the full length of the track. No ugly end caps or unsightly block covers!

High Line also features a Drill Guide on both the inside and outside of the track, ensuring ease when drilling the holes for the installation screws.

### IMPORTANT NOTES:

- Discussion with any builders involved should be undertaken as early as possible.
- It is highly recommended that there be solid fixing above the area where the tracks are to be installed. This will ensure all the screws can be placed correctly and fixed into solid timber (Remember, you can't use GIB Anchors as the track is attached above the GIB line).
- The GIB cuts will need to be at least 14.3mm wide to fit the track profile, but no wider than 20mm to ensure they remain covered by the track flange.
- Screws must be positioned at each end of the track, and no further apart than 500mm along the length of the track.
- **Fitters must take care not to make contact with the glide channel when drilling screw holes or inserting the screws (No warranty will be honoured for damage to the glide channel caused during fitting).**
- It is recommended the track is placed on a solid level surface when drilling the screw holes.
- Fitters must use the screws provided (otherwise warranty will be voided).
- Fitters must ensure all the screws are tightened fully and not protruding inside the track.
- **Recommended Drill Bit size: 2.5mm**
- **Recommended Driver size: SQ1**

For information on bent tracks, please contact the office on 0800704050